



energybank. ThinLine® LED Architectural Troffer

DESCRIPTION

Designed for quick, easy installation featuring a sleek, contemporary, ultra-compact design. Field adjustable from 6 - 60W with optional potentiometer on back of fixture. Patent-pending insect-free lens design. Over 100,000 hour life with zero maintenance costs. Constructed of 98% pure 3105 aluminum with a durable, composite polyester exterior finish. White is standard. Troffer panels in either reflective Optical White or non-reflective Matte White allow for fast, easy installation into conventional 2x4 ft. grids. No on-site assembly required.

SPECIFICATIONS

Lumens:	2,943	3,176	4,426	5,673
Wattage:	25	30	45	60
Weight:	7.35 lbs.			
Dimensions:	L 47.750" x W 23.750" x H 4.000"			
Listed/Rated:	UL, DLC, IC			
*DLC Model #	TLA25-UNF2-40WH-Pxx TLA25-UNF2-50WH-Pxx	TLA30-UNF2-40WH-Pxx TLA30-UNF2-50WH-Pxx	TLA45-UNF2-40WH-Pxx TLA45-UNF2-50WH-Pxx	TLA60-UNF2-40WH-Pxx TLA60-UNF2-50WH-Pxx
Color Temp: 4000K. 5000K option.				
CRI: >82				
Line Voltage: Universal 120-277V				
Power Supply: Hardwire standard				
Surge Protection: Integrated 2.5kV transient voltage protection				
Ambient Operating Temperature: -30° to 40° C / -22° to 104° F				
Environment: Damp rated. Insulation contact rated.				
Lens: Non-glare optical grade Acrylic. Insect-free design. Other options available.				
Mount: 2x4 ft. T-bar ceiling				
Warranty: 5-year Standard Limited				
Manufacturer: Genesis Energy Technology				

ORDERING INFORMATION


EXAMPLE: **TLA25-UNF2-40WH-PMW-HW-MSX** Lead times and costs may vary depending on options selected. Consult your sales representative for more information. Standard configuration highlighted in Gray.

TLA	UN	F2	WH	P	HW				
Model	Wattage	Voltage	Optics	Color Temp	Fixture Color	Configuration	Panel Finish	Power Supply	Motion Sensor
TLA: ThinLine Architectural	25: 25W 30: 30W 45: 45W 60: 60W	UN: 120-277V	F2: White lens	40: 4000K 50: 5000K	WH: White	P: Panel	MW: Matte white WH: Optical white gloss	HW: Hardwire	MSX: None P: Potentiometer ¹ (dimming knob on back of fixture)

Specifications subject to change without notice.
¹ Dimming down to 6W with optional potentiometer



ThinLine Architectural with its elegant, contemporary form factor that will meet or exceed aesthetic and performance requirements.

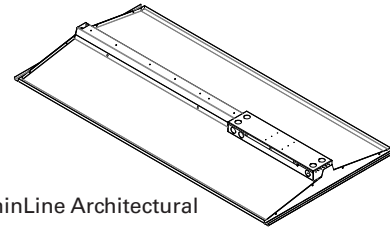

ThinLine Architectural

Tether (GTT-TL)



Hurricane clip (GHC-TL)



One GTT-TL included, attached to fixture. Additional GTT-TL & GHC-TL may be purchased separately.



*Not all products are qualified on the DLC QPL. To view our DLC qualified products, please consult the DLC Qualified Products List at www.designlights.org/search.

www.energybankinc.com

Genesis Energy Technology www.gettedlight.com
© 2017 SPECThinLine Architectural EB 20170829