

Infrared LED Strobe Light on Trunnion Wall Mount - 8, 3W LEDs - 9-42 Volts - 850 or 940nm - 1200 Hz

Part #: LEDLB-8ET-IR-1200HZ

**Buy American Compliant**

The LEDLB-8ET-IR-1200HZ from Larson Electronics is a Strobming Infrared LED Light Bar that offers high 1200 Hz infrared strobing light output and extreme durability combined with a versatile trunnion mounting system that provides 270 degrees of adjustability. This IP68 rated IR LED light bar is waterproof to three feet and produces 1,440 lumens of infrared light while drawing only 24 watts of power @ 2 amps from a 12 volt electrical system. This light can run on any voltage from 9 to 42 volts and produces an infrared light beam that can only be seen through the use of night vision goggles. 850Nm versions have a very slight red glow around the LED emitters when viewed from a certain angle while 940 Nm versions are completely invisible to the naked eye. This light provides an extremely rugged infrared lighting solution that is ideal for use in commercial and industrial security applications as well as military environments.

The LEDLB-8ET-IR-1200HZ strobing LED light bar from Larson Electronics produces a 325` long by 70` wide light beam with 1440 lumens of infrared light. Eight 3 watt Edison Edixeon® Infrared Emitters producing 180 lumens each are arranged in rows and paired with high purity 10 degree optics to produce a tightly focused spot beam with limited spread or light spillage. We also offer optional floodlight versions with 35 degree optics to produce a wider beam spread and more light over a larger area nearer the fixture. These infrared LED light bars are IP68 rated and waterproof to 3 feet, sealed against intrusion by dust and dirt and very ruggedly constructed to withstand the most demanding environments, conditions and applications. The entire Larson Electronics LEDLB-E series are constructed of extruded aluminum and feature heavier housings, rubber isolated mounts and unbreakable polycarbonate lenses to provide increased durability against vibrations, impacts, waves, hard rains, sand and high winds.

The entire Larson Electronics LEDLB-E series are constructed of extruded aluminum and feature heavier housings, rubber isolated mounts and unbreakable polycarbonate lenses to provide increased durability against vibrations, impacts, waves, hard rains, sand and high winds. This light is equipped with a 200 lb grip magnetic mount base and 16 foot coil cord ending in a cigarette plug connector. This magnetic base allows fast and easy setup of this light on vehicles and equipment and will hold the fixture in place at speeds up to 70 MPH provided the mount is properly affixed and secure.

[Click here](#) to view an article on the Generations of Night Vision and Infrared.



Security camera view (no LED emitter bar)

[Click Photo to Enlarge](#)



Security camera view with 8 LED IR light

[Click Photo to Enlarge](#)

LED Benefits: Unlike gas burning and arc type lamps that have glass bulbs, LEDs have no filaments or fragile housings to break during operation and/or transportation. Instead of heating a small filament or using a combination of gases to produce light, light emitting diodes (LEDs) use semi-conductive materials that illuminate when electric current is applied, providing instant illumination with no warm up or cool down time before re-striking. Because there is no warm up period, this light can be cycled on and off with no reduction in lamp life.


LED lights run at significantly cooler temperatures than traditional metal halide and high pressure sodium lights and contain no harmful gases, vapors, or mercury, making them both safer and more energy efficient. No extra energy is wasted in cooling enclosed work areas due to external heat emissions from bulb type lights, and the operator risks associated with traditional lighting methods, such as accidental burns and exposure to hazardous substances contained in the glass bulbs, are eliminated. In addition, LEDs are also safer for the environment as they are 100% recyclable, which eliminates the need for costly special disposal services required with traditional gas burning and arc type lamps.

Heat Management: Heat is the single largest factor in premature LED failure and color shifting. As a result, many manufacturers reduce the output of their LEDs to reduce the amount of heat produced. These LED light bars utilize an extruded aluminum housing that incorporates an advanced heat radiating fin design which dissipates heat efficiently to produce the maximum amount of power and longevity from the integrated Edison Edixeon® LEDs. The end result is more light and longer LED life with higher average lumen maintenance after 50,000 hours.

Voltage Control: These units are able to monitor and adjust input current to maintain the correct LED voltage levels regardless of input levels across a specific range. These LEDLB series light bars can operate on current ranging from 9 to 42 V DC without any modifications necessary as a result. This multi-voltage capability makes these units ideal for mobile and standalone applications such as those found on commercial boats, heavy equipment and vehicles where power systems don't always operate with 12 volts and external generators, transformers or inverters are impractical.

LEDLB-8ET-IR-1200HZ 35° Flood Beam

LEDLB-8ET-IR-1200HZ 10° Spot Beam

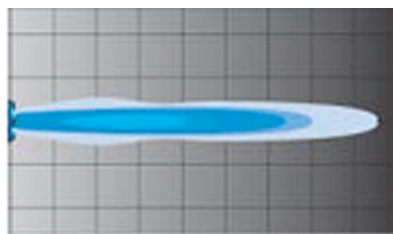

Durability: The LEDLB-E series of LED light bars from Larson Electronics offer IP68 rated construction that is designed to withstand extremes of environmental and operating conditions. The LED lights with the `E` part number designation are designed for extreme durability and are larger and nearly twice as heavy as their standard counterparts. These units can withstand rapid temperature changes of -40 degrees Celsius to

85 degrees Celsius, are waterproof to three meters and resist ingress of dust, dirt and humidity. The housings are formed from thick extruded aluminum and the lenses are unbreakable polycarbonate. The Edixeon® LEDs offer inherent LED resistance to shocks and vibrations contributing to these units 15.6Grms rating of vibration tolerance. We recommend these LED lights for high stress - high vibratory conditions, high humidity climates, very cold areas and rough saltwater conditions. They are also well suited to environments where equipment is used in one temperature extreme and stored in another temperature extreme.

Adjustable Mounting: The trunnion mounting design on the LEDLB-8ET-IR-1200HZ allows for post-installation angle positioning. This means that by loosening 2 thumb bolts located on either side of the light, the operator can adjust the positioning angle of this light 270 degrees. Then he/she would simply have to tighten thumb bolts to lock the angle in place. No tools are required for adjusting angle. We also offer a BC-2 bar clamp mounting system [you can view here](#) for even greater mounting versatility.

Note: Most Larson Electronics LEDLB, LEDP3W, LEDP10W, and LED10W series LED spotlights and floodlights are terminated with a Deutsch IPD / LADD DT04-2P connector. The mating connector plug is DT06-2S. Most LEDLB and LED10W series lights ship with mating connector as part of a harness or pigtail, depending on the model. Some larger LED lights like the LEDLB-160X2 or LEDLB-200X2 or multiple function LED lights (i.e. high/low beam, modulating, IR/Visible combos) will have different Deutsch connectors.

Measurements: Taken at 5 feet from the lens.

- 850nm Spot - 1430 uWatts/cm²
- 850nm Flood - 190 uWatts/cm²
- 940nm Spot - 940 uWatts/cm²

At Larson Electronics, we do more than meet your lighting needs. We also provide replacement, retrofit, and upgrade parts as well as industrial grade power accessories. Our craftsmen can custom build any lighting system and/or accessories to fit the unique demands of your operation. A commitment to honesty, quality, and dependability has made Larson Electronics a leader in the lighting and electronics business since 1973. Contact us today at 800-369-6671 or message sales@larsonelectronics.com for more information about our custom options tailored to meet your specific industry needs.

Specifications / Additional Information

LEDLB-8ET-IR-1200HZ LED Light Bar

LEDs: (8) Edixeon® 3 Watt LEDs

Dimensions: 6.25"L x 3"H x 3.56"D

Watts: 24

Voltage: 9-46 V DC

Weight: 3.4 lb

Lighting Configuration: 10° Spot or 35° Flood

Frequency: 1200 Hz

Mounting: Trunnion Bracket

Wiring: Deutsch IPD / LADD DT04-2P Connector

Amps: 2 (on 12 volts) 1 (on 24 volts)

Lumens: 1440

LED Light Color: 850 Nm or 940 Nm Infrared

LED Life Expectancy: 50,000 Hours

Optics Efficiency: 90%

Materials: Aluminum Housing, Polycarbonate Lens

Housing Colors: Black or White

-Scroll Down to Purchase-

LEDLB-8ET-IR-1200HZ LEDLB LED Features

Edixeon® 3 Watt LEDs

LEDs Driven At 80%

-40°C~ +80°C Operating Temp Range

RoHS Compliant

70% Lumen Retention @ 65,000 hours

LED Chip Op Temp -40°C to +125°C

IP68 Rated Waterproof to 3 Meters

CE Certified

Special Orders- Requirements

Contact us for special requirements

Toll Free: 1-800-369-6671

Intl: 1-214-616-6180

E-mail: sales@larsonelectronics.com

This product does not qualify for free shipping.

Part #: LEDLB-8ET-IR-1200HZ (224510)

Options:

LEDLB-8ET-IR-1200HZ- **BEAM CONFIG** - **WAVELENGTH** - **HOUSING COLOR**

Example: LEDLB-8ET-IR-1200HZ-**SP**-**750NM**-**BLK**

BEAM CONFIG		WAVELENGTH		HOUSING COLOR	
Spot	-SP	750nm	-750NM	Black	-BLK
Flood	-FL	850nm	-850NM	White	-WHT
		940nm	-940NM		









Links (Click on the below items to view):

- [Hi-Res Image 1 - Infrared LED Light Emitter on Trunnion Wall Mount \(Main\)](#)
- [Hi-Res Image 2 - Infrared LED Light Emitter on Trunnion Wall Mount \(Front\)](#)
- [Hi-Res Image 3 - Infrared LED Light Emitter on Trunnion Wall Mount \(Side\)](#)
- [Hi-Res Image 4 - Infrared LED Light Emitter on Trunnion Wall Mount \(Back\)](#)
- [Hi-Res Image 5 - Infrared LED Light Emitter on Trunnion Wall Mount \(Back Angle\)](#)