

25W Portable Explosion Proof Mini LED Light - C1D1-2 - C2D1-2 - 25' SOOW Cord- 120-277V to 12V/24V


Part #: EXHL-PM-LE1-XLV-25



Made in Texas

The EXHL-PM-LE1-XLV-25 from Larson Electronics is an Explosion Proof Portable LED Light Fixture that operates on 120-277V AC that is stepped down to 12V DC or 24V DC via an inline transformer and that produces 1,320 lumens while drawing only 25 watts. The EXHL-PM-LE1-XLV-25 is Class I, Divisions 1 & 2, Groups B, C, D, Class I, Zones 1 & 2, Groups IIB+H2, IIA, Class II, Divisions 1 & 2, Groups E, F, G and Class III Divisions 1 & 2 rated for hazardous areas and is listed for use worldwide including the United States, Canada, Europe and Asia. This explosion proof LED light fixture also features an aluminum A-frame portable base stand convenient and simple use in the work place.

The EXHL-PM-LE1-XLV-25 produces 1,320 lumens of high-intensity LED light for illumination within hazardous areas and potentially explosive work environments. This explosion proof LED light fixture operates on voltages ranging from 120-277V AC. This input voltage is then stepped down to either 12V DC or 24V DC to operate the light via an inline transformer. The transformer is encapsulated to make it weatherproof, but it is NOT explosion proof and must remain located outside of the hazardous area. With 25' of 16/3 SOOW cable between the light and the encapsulated transformer, there is plenty of room to move around the hazardous work area while keeping the transformer in a safe location. The EXHL-PM-LE1-XLV-25 is available in two lighting configurations; spot and flood. The spot configuration features a 10° beam that measures 800`L and 140` W. The flood configuration throws a 40° beam that measures 300`L and 225`W.

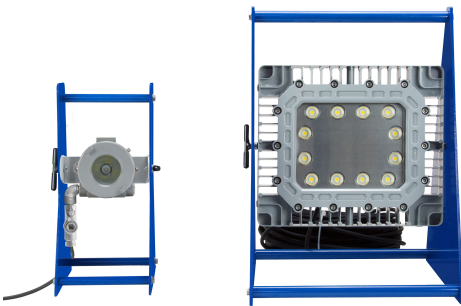

[Click Photo to Enlarge](#)

LED Benefits: Unlike gas burning and arc type lamps that have glass bulbs, LEDs have no filaments or fragile housings to break during operation and/or transportation. Instead of heating a small filament or using a combination of gases to produce light, light emitting diodes (LEDs) use semi-conductive materials that illuminate when electric current is applied, providing instant illumination with no warm up or cool down time before re-striking. Because there is no warm up period, this light can be cycled on and off with no reduction in lamp life.

LED lights run at significantly cooler temperatures than traditional metal halide and high pressure sodium lights and contain no harmful gases, vapors, or mercury, making them both safer and more energy efficient. No extra energy is wasted in cooling enclosed work areas due to external heat emissions from bulb type lights, and the operator risks associated with traditional lighting methods, such as accidental burns and exposure to hazardous substances contained in the glass bulbs, are eliminated. In addition, LEDs are also safer for the environment as they are 100% recyclable, which eliminates the need for costly special disposal services required with traditional gas burning and arc type lamps.

Heat Management: Heat is the single largest factor in premature LED failure and color shifting. These LED units contain advanced drivers which use pulse width modulation to control heat buildup rather than simple voltage regulators which are typically harsh on sensitive electronics and can contribute to early LED failure. These units automatically sense the temperature of each LED and adjust the energy frequency or "duty cycle" accordingly to maintain heat levels within acceptable ranges. This system in essence flashes current at an extremely fast on and off rate to each LED based upon the LED's core temperature. This flash rate is too fast to detect with the human eye, but provides precise control of the current flowing to each LED and thus the heat it generates. This allows the LEDs to be driven at up to 100% capacity without overheating or visible loss of light output. The LEDs are always driven at the same voltage but the duty cycle, however, is changed to alter how long the LEDs are actually on or off. The end result is more light with less heat and longer LED life with an average 70% lumen maintenance after 50,000 hours.

[Click Photos to Enlarge](#)



5-15 Straight Blade Plug
15 Amp / 125V Rated



L5-15 Twist Lock Plug
15 Amp / 125V Rated



L6-15 Twist Lock Plug
15 Amp / 250V Rated



UK BS1363 Straight Blade Plug
13 Amp / 250V Rated / Internal Fuse



Intl Schuko 2-Pin Plug
16 Amp / 250V Rated / Grounded



Flying Leads / Pigtail Wires

Wiring/Plug: This explosion proof LED light fixture is equipped with 25 feet of 16/3 chemical and abrasion resistant SOOW cord between the transformer and cord cap. The cord cap is an industrial grade cord cap for easy connection to common wall outlets. Plug options include standard 5-15 15 amp straight blade plug for 110V wall outlets with ground, standard 6-15 15 amp straight blade plug for 220-240V wall outlets with ground, NEMA L5-15 15 amp twist lock plug for 125V twist lock outlets, NEMA L6-15 15 amp twist lock plug for 240V twist lock outlets, British BS1363 13 amp fused 3-blade plug for United Kingdom outlets, or a two pin 16 amp rated Schuko plug with ground contact and socket for European outlets up to 250V. Alternatively, we can provide flying leads with no plug for hard wire applications or for operators who prefer to wire in user provided cord caps. Please choose pigtail option below for flying leads with no plug.

PLEASE NOTE: WHILE THE LIGHT ITSELF IS EXPLOSION PROOF, THE INCLUDED STEP DOWN TRANSFORMER IS NOT AND MUST REMAIN OUTSIDE THE HAZARDOUS AREA

Durability: The EXHL-PM-LE1-XLV-25 explosion proof LED light fixture from Larson Electronics is rated NEMA Type 3, 4, 4X, 7 (B,C,D) and 9 (E,F,G) and designed to withstand the rigors of demanding of environmental and operating conditions while remaining lightweight and easy to use. These units can operate in temperatures of -40° Celsius to 60° Celsius, are waterproof to 3 meter and resist ingress of dust, dirt and humidity. The housings are formed from extruded aluminum and the lenses are unbreakable polycarbonate. The LEDs offer inherent LED resistance to shocks and vibrations.

Mounting: This explosion proof LED light fixture is comprised of a 9 inch round LED light head mounted within a portable base stand fabricated from non sparking aluminum with a convenient carrying handle built into the top of the stand. The aluminum A-frame is powder coated with glossy blue finish for corrosion resistances and aesthetics. The lamp can be easily adjusted up or down 90 degrees and locked into position by

simply loosening the two hand screws located on either side of the light head and retightening them once the desired angle is found.

High Quality Features

1. Low power consumption.
2. Instant on/off operation.
3. Fixture constructed of extruded corrosion resistant copper free aluminum alloy.
4. Superior color rendering compared to HPS, LPS, MH.
5. Retains 70% lumen output after 50,000 operating hours.
6. Powder coated aluminum fixture body.
7. Portable A-frame base stand included.
8. Low profile - Light weight
9. 1,320 Lumen output from 25 watts

Superior LED Benefits

1. 50,000+ hour lifespan.
2. Can SAVE 50% or more on energy.
3. Qualifies retrofit projects for financial incentives, including utility rebates, tax credits and energy loan programs.
4. Reduces energy use and prolongs life-spans of peripheral cooling units (A/C, refrigeration)
5. 100% recyclable.
6. No toxins-lead, mercury.
7. No UV light, infrared radiation or CO2 emissions.
8. Qualifies buildings for LED and other sustainable business certifications.
9. Bright, even light maintains consistent color over time.
10. Instant on/off - No flickering, delays or buzzing.
11. Very good color rendering.
12. Vibration/impact resistant.
13. Significantly cooler operation.
14. Less frequent outages, higher output improves workplace safety.

At Larson Electronics, we do more than meet your lighting needs. We also provide replacement, retrofit, and upgrade parts as well as industrial grade power accessories. Our craftsmen can custom build any lighting system and/or accessories to fit the unique demands of your operation. A commitment to honesty, quality, and dependability has made Larson Electronics a leader in the lighting and electronics business since 1973. Contact us today at 800-369-6671 or message sales@larsonelectronics.com for more information about our custom options tailored to meet your specific industry needs.

Specifications / Additional Information**EXHL-PM-LE1-XLV-25 Explosion Proof LED Light Fixture****Lamp Type:** LED**Dimensions:** 8"L x 6"W x 14"H**Watts:** 25W**Voltage:**120-277V AC Stepped Down to 12V DC or 24V DC**Lumens:** 1,320**Luminous Efficacy:** 53 Lm/W**LED Light Color:** 6000K - White**LED Life Expectancy:** 50,000 hours**Lighting Configuration:** 10° Spot or 40° Flood**Spot Beam:** 800`L x 140`W**Flood Beam:** 300`L x 225`W**Ambient Operating Temp Range:** -40°C to +60°C**Wiring:** 25` 16/3 SOOW Between Transformer & Light - 10` 16/3 SOOW Between Transformer & Cord Cap**Cord Cap Options:** 5-15 Straight, 6-15 Straight, L5-15 Twist, L6-15 Twist, UK BS1363, Intl. Schuko, Pigtail**Housing Material:** Aluminum**Light Housing Color:** Powder Coated - Grey**Lens Material:** Polycarbonate**Mounting:** Powder Coated A-Frame Portable Base Stand - Glossy Blue**Warranty:** Yes - 1 Year***Ratings/Approvals**

Listed for United States, Canada, Europe, Asia

Class I, Div. 1 & 2, Groups B, C, D

Class I, Zones 1 & 2, Groups IIB+H2, IIA

Class II, Div. 1 & 2, Groups E, F, G

Class III, Div. 1 & 2

NEMA Type 3, 4, 4X, 7 (B,C,D), 9 (E,F,G)

ATEX Ex II 2 G / D

IECEX db IIC Gb

IECEX tb IIC Db IP66

Special Orders- Requirements

Contact us for special requirements

Toll Free: 1-800-369-6671**Intl:** 1-903-498-3363**E-mail:** sales@larsonelectronics.com[Scroll Down to Purchase-](#)

[This product does not qualify for free shipping.](#)

[Part #: EXHL-PM-LE1-XLV-25 \(148347\)](#)

Options:

EXHL-PM-LE1-XLV-25- **VOLTAGE** - **CORD CAP** - **BEAM CONFIG**

Example: EXHL-PM-LE1-XLV-25-12VDC-5.15-SP

VOLTAGE		CORD CAP		BEAM CONFIG	
12V DC	-12VDC	5-15 Straight	-5.15	10° Spot	-SP
24V DC	-24VDC	6-15 Straight	-6.15	40° Flood	-FL
		L5-15 Twist	-L5.15		
		L6-15 Twist	-L6.15		
		UK BS1363	-BS1363		
		Intl. Schuko	-Schuko		
		Pigtail	-Pigtail		

Links (Click on the below items to view):

- [SpecSheet French](#)
- [SpecSheet Spanish](#)
- [SpecSheet Russian](#)
- [Hi-Res Image 1 - 25 Watt Portable Explosion Proof LED Light](#)